
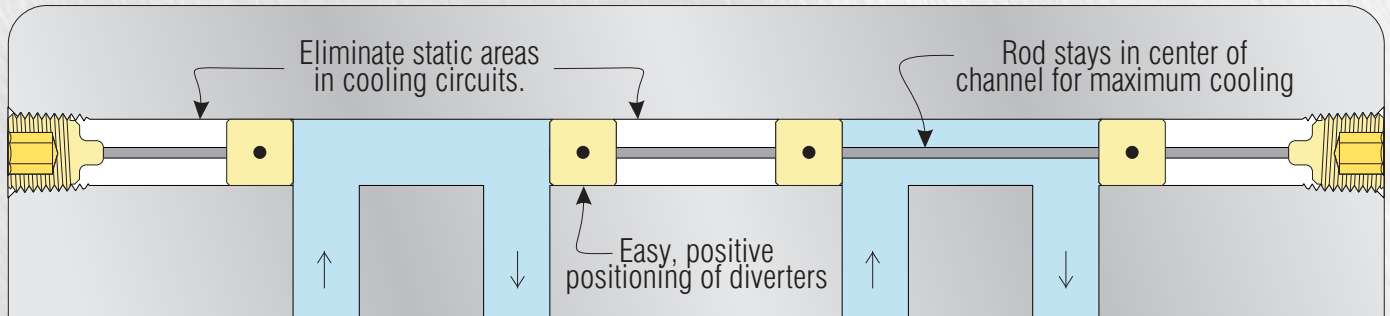



# Pipe Plug Diverters

Pipe plug is pre-assembled to locating rod for positive installation and removal.

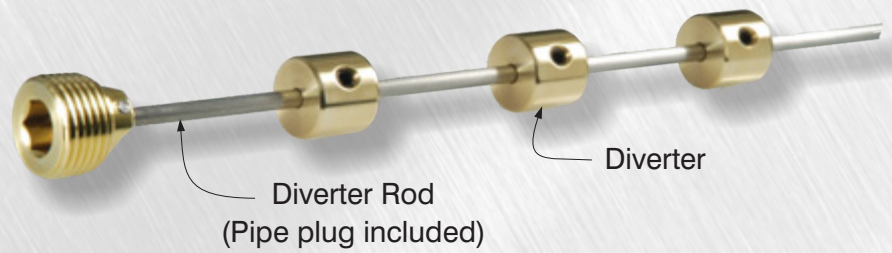

## Diverter Rods

- **No special tools required.**
- Simply lock diverters in position on the stainless rod, and install into the cooling channel.
- Rod stays in the center of the cooling channel, allowing maximum heat transfer to coolant.
- Choose the pipe size and length from the chart. Then choose diverters below. Longer length Diverter Rods are in stock.

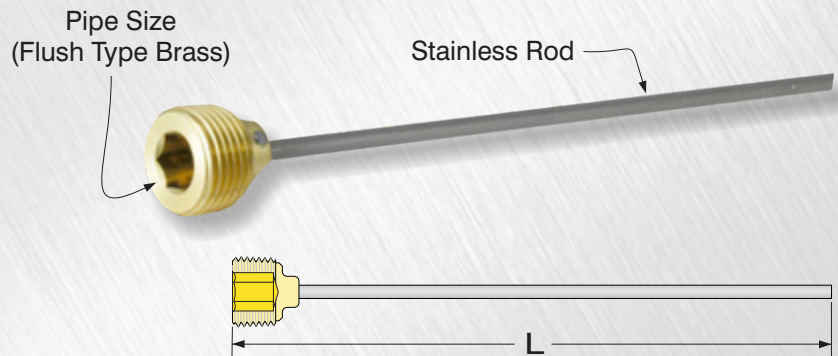


Diverter Rods are available with BSP threads from stock.  
Please see [www.custommold.com](http://www.custommold.com) for details.

Catalog Number	Pipe Size (NPT)	Overall Length (L)*	Rod Dia.	Use Diverter Number	Stock Item
DR-125	1/8	12	3/32	D-125	•
DR-250	1/4	18	1/8	D-250	•
DR-375	3/8	18	1/8	D-375	•
DR-500	1/2	24	3/16	D-500	•
DR-750	3/4	24	3/16	D-750	•
DR-1000	1	36	3/16	D-1000	•
DR-1250	1 1/4	36	1/4	D-1250	•

## Diverters

- Order in any quantity.
- Locking screw included.
- Special and metric sizes available.

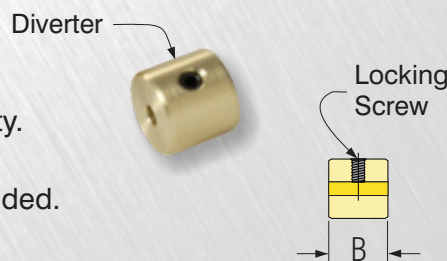

Catalog Number	For Pipe Size (NPT)	Diverter O.D. (-.005)*	Diverter Length B	Fits Rod Dia.	Stock Item
D-125	1/8	.340	3/8	3/32	•
D-250	1/4	.432	7/16	1/8	•
D-375	3/8	.557	1/2	1/8	•
D-500	1/2	.682	3/4	3/16	•
D-750	3/4	.932	3/4	3/16	•
D-1000	1	1.115	3/4	3/16	•
D-1250	1 1/4	1.458	3/4	1/4	•