
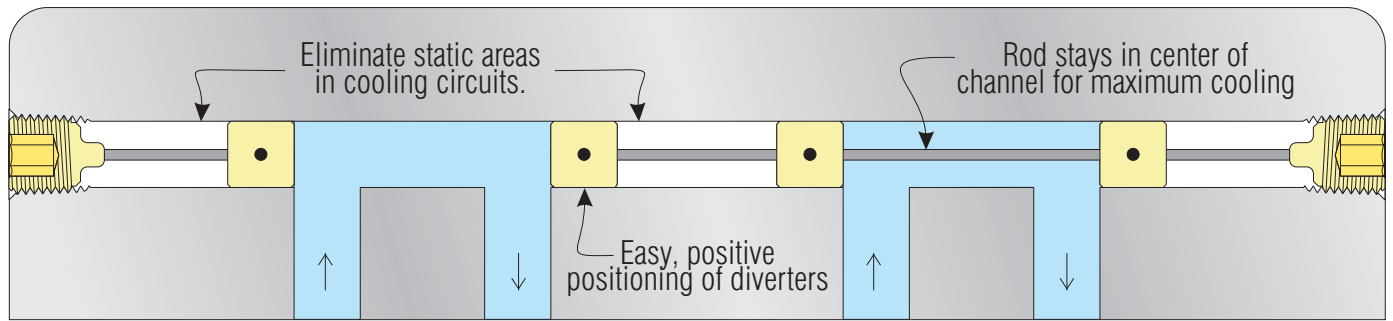



# Pipe Plug Diverters

Pipe plug is pre-assembled to locating rod for positive installation and removal.

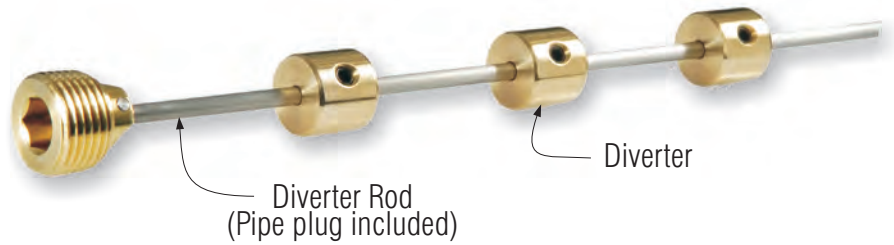

## Diverter Rods

- No special tools required.
- Simply lock diverters in position on the stainless rod, and install into the cooling channel.
- Rod stays in the center of the cooling channel, allowing maximum heat transfer to coolant.
- Choose the pipe size and length from the chart. Then choose diverters below. Longer length Diverter Rods are in stock.

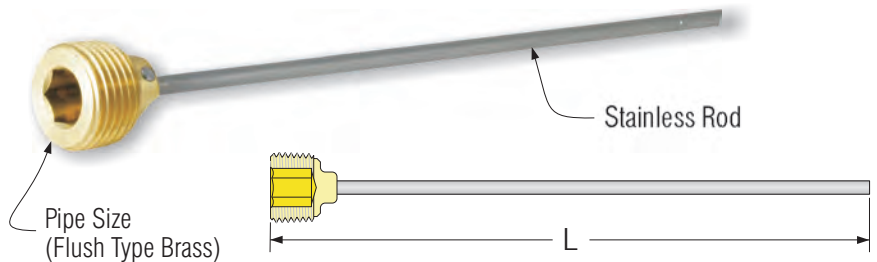


Catalog Number	Pipe Size (NPT)	Overall Length (L)*	Rod Dia.	Use Diverter Number	Stock Item
DR-125	1/8	12	3/32	D-125	•
DR-250	1/4	18	1/8	D-250	•
DR-375	3/8	18	1/8	D-375	•
DR-500	1/2	24	3/16	D-500	•
DR-750	3/4	24	3/16	D-750	•
DR-1000	1	36	3/16	D-1000	•
DR-1250	1 1/4	36	1/4	D-1250	•

\* Longer lengths in stock

## Diverters

- Order in any quantity.
- Locking screw included.
- Special and metric sizes available.

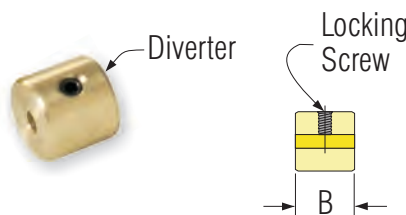

Catalog Number	For Pipe Size (NPT)	Diverter O.D. (-.005)*	Diverter Length B	Fits Rod Dia.	Stock Item
D-125	1/8	.340	3/8	3/32	•
D-250	1/4	.432	7/16	1/8	•
D-375	3/8	.557	1/2	1/8	•
D-500	1/2	.682	3/4	3/16	•
D-750	3/4	.932	3/4	3/16	•
D-1000	1	1.115	3/4	3/16	•
D-1250	1 1/4	1.458	3/4	1/4	•

\* Custom diameters available