



Quick-Coupler Type Cascades

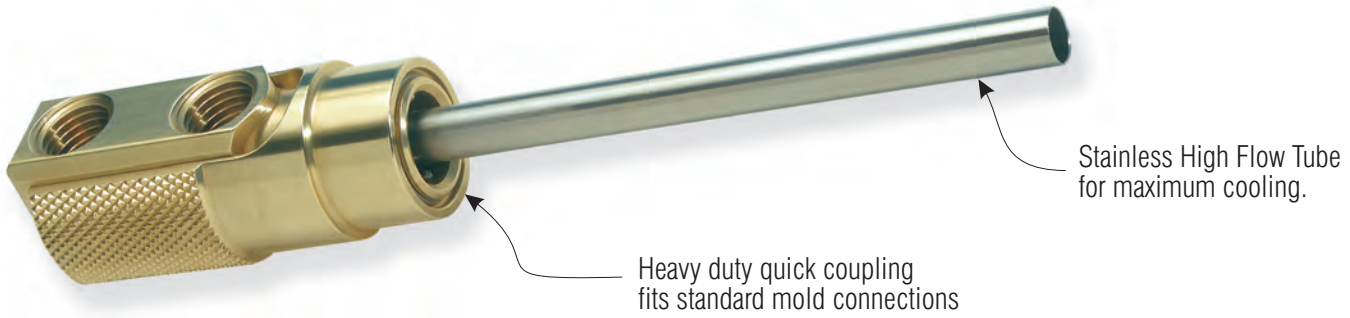

- Can be installed and removed without disconnecting coolant lines.
- Viton Seals standard.
- High flow design provides maximum cooling rates.
- 12" High Flow Stainless tube, and Brass Pipe Plug included.

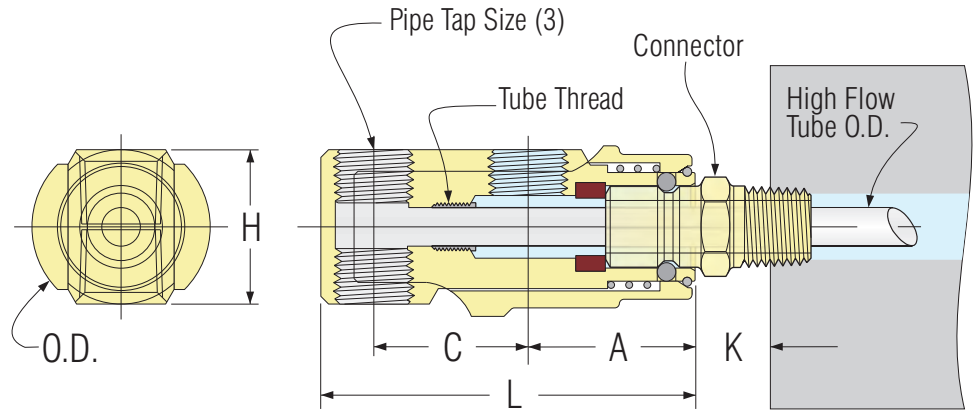

Catalog Number	Pipe Tap Size (NPT)	Connector Series	Tube Thread	High Flow Tube Included	L	C	A	H	O.D.	Stock Item
SC186N	1/8	200	1/4-28	HF187T-12	1.937	1 1/16	3 1/32	1 3/16	7/8	•
SC181N	1/8				2.250	1	3 1/32	1 3/16	7/8	•
SC146N-4	1/4	300	5/16-24	HF250T-12	2.187	1 1/16	1 5/32	1	1 1/8	•
SC141N-4	1/4				2.500	1	1 5/32	1	1 1/8	•
SC121N-4	1/4	500	1/2-20	HF437T-12	3.125	1 1/4	1 3/8	1 1/4	1 3/8	•
SC121N-6	3/8				3.125	1 1/4	1 3/8	1 1/4	1 3/8	•

See tube specifications on page 7.

Catalog Number	Connector	K Min.
SC186N	251	.32
	252	.43
	253	.49
SC146N-4	351*	.34
	352	.42
	353	.45
	354	.57
SC121N-4	553**	.55
	554	.54
	556	.57

* Uses High Flow Tube JHF187T-
** Uses High Flow Tube JHF375T-

Quick-Coupler Cascade Heads Only

- Aids in quick and efficient assembly and disassembly of cooling circuit.
- Heavy duty all brass and stainless steel construction.
- Dimensions are same as above for corresponding catalog number.
- Brass Pipe Plug Included.



Catalog Number	Tube Thread Size	Standard High Flow Tube No.	Stock Item
SC186H	1/4-28	HF187T-	•
SC181H			•
SC146H-4	5/16-24	HF250T-	•
SC141H-4			•
SC121H-4	1/2-20	HF437T-	•
SC121H-6			•

Order tubes for these heads on page 7.

High Flow Stainless Tubes



*Increase Flow
up to 300% !!*

- All stainless construction for high strength and durability.
- Cut to exact lengths at no charge.
- We stock over 150 sizes of thin wall stainless tube.
- We build stepped tube assemblies and custom threaded tubes to your print.

Catalog Number	Thread Size	Thread Length	Tube O.D.	Tube I.D.	Overall Length "L"			
					12"	18"	24"	36"
HF093T- JHF093T-	5-44 10-32	1/8 3/16	.090	.076	•	•	•	•
HF125T- JHF125T-	10-32 1/4-28	3/16 1/4	.125	.109	•	•	•	•
HF187T- JHF187T-	1/4-28 5/16-24	1/4 5/16	.187	.167	•	•	•	•
HF250T- JHF250T-	5/16-24 3/8-24	5/16 3/8	.250	.230	•	•	•	•
HF312T- JHF312T-	3/8-24 7/16-20	3/8 7/16	.312	.288	•	•	•	•
HF375T- JHF375T-	7/16-20 1/2-20	7/16 1/2	.365	.340	•	•	•	•
HF437T-	1/2-20	1/2	.427	.397	•	•	•	•

STOCK ITEM

To order, specify Catalog Number and Overall Length. Example: HF250T-18

Standard Brass Tubes



- Tubes 18" and longer have both ends threaded
- Half-hard temper for reliable performance.
- Also available in Stainless Steel.
- Bulk tube available.


Catalog Number	Tube O.D.	Tube I.D.	Thread Size	Thread Length	Overall Length "L"			
					12"	18"	24"	36"
125T-	.125	.061	5-44	3/16	•	•	•	•
187T-	.187	.123	10-32	3/16	•	•	•	•
250T-	.250	.170	1/4-28	1/4	•	•	•	•
312T-	.312	.210	5/16-24	5/16	•	•	•	•
375T-	.375	.273	3/8-24	3/8	•	•	•	•
437T-	.437	.307	7/16-20	7/16	•	•	•	•
625T-	.625	.495	5/8-18	5/8	•	•	•	•

STOCK ITEM


To order, specify Catalog Number and Overall Length. Example: 250T-18

Piston Tubes

- All stainless steel construction provides high strength and reliable performance.
- Flow thru pipe plug available in custom sizes and materials.

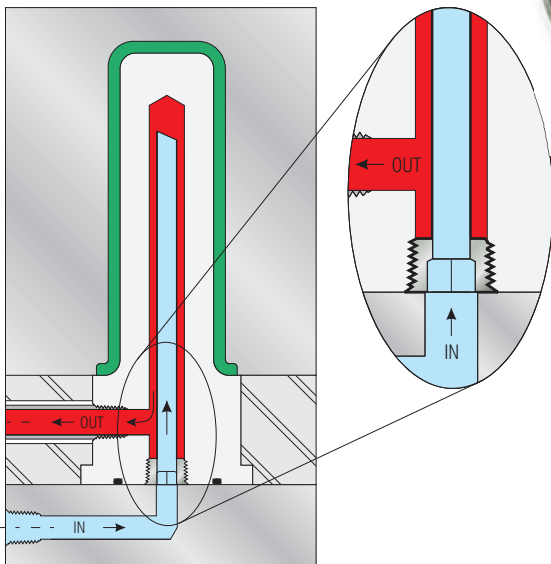

Coolant flows through hex socket and high flow stainless tube.

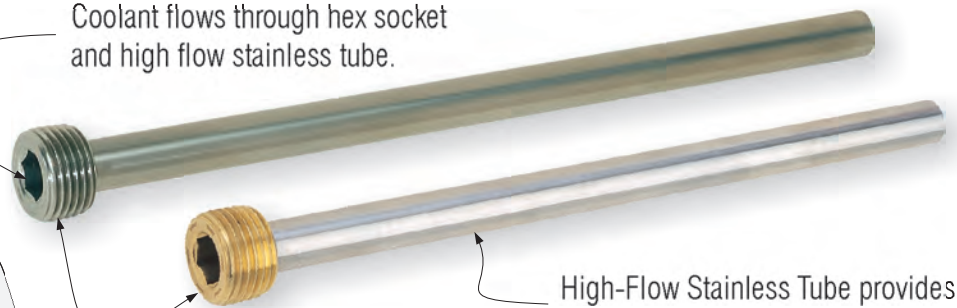

High-Flow Stainless Tube provides maximum cooling rates.

Available all stainless steel, or stainless tube with brass pipe plug.

Catalog Number (Stain. Plug)	Catalog Number (Brass Plug)	Pipe Size (NPT)	Tube O.D.	Tube I.D.	Overall Length "L"			
					12"	24"	36"	48"
PT16-	PT16B-	1/16	.125	.109	•	•	•	•
PT18-	PT18B-	1/8	.187	.167	•	•	•	•
PT14-	PT14B-	1/4	.250	.230	•	•	•	•
PT38-	PT38B-	3/8	.365	.340	•	•	•	•
PT12-	PT12B-	1/2	.365	.340	•	•	•	•
PT34-	PT34B-	3/4	.427	.397	•	•	•	•

STOCK ITEM

To order, specify Catalog Number and Overall Length. Example: PT14-24

Pipe Plugs

- Finest quality - Made In USA.
- Std qty. 100 pcs. on sizes 1/16 - 3/8. No additional charge for partial boxes.
- Standard plugs are flush type (7/8 taper). Oversize (3/4 taper) also available from stock.




Catalog Number	Pipe Plug Material	Thread Size (NPT)										Stock Item
		1/16	1/8	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	
Plug Height H →		.250	.250	.406	.406	.531	.531	.656	.656	.656	.656	
BF-	Brass	•	•	•	•	•	•	•	•	•	•	•
SF-	Alloy Steel	•	•	•	•	•	•	•	•	•	•	•
SSF-	Stainless	•	•	•	•	•	•	•	•	•	•	•

To order, specify Catalog Number and pipe size. Example: BF-1/4


Heavy Duty Pipe Plugs

With Patented  Technology....

- Standard brass flush seal plugs with  forming technology for maximum wrenching torque.
- Extra deep socket can't "round out" when plugs are installed or removed.
- Order in any quantity



Extra deep socket is stronger, and will not strip out.

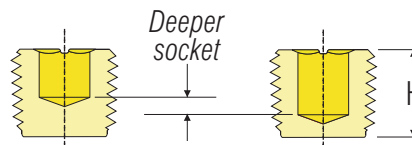

Catalog Number	Pipe Plug Material	Thread Size (NPT)						
		1/16	1/8	1/4	3/8	1/2	3/4	
XTBF-	Brass	•	•	•	•	•	•	

To order, specify Catalog Number and pipe size. Example: XTBF-1/4

Pipe Size	Plug Ht. H
1/16	.296
1/8	.312
1/4	.421
3/8	.484
1/2	.625
3/4	.625

BSP Pipe Plugs

- Fits BSPT and BSPP threaded holes.
- Features extra deep socket for strength.
- Order in any quantity

BSP Identification Ring



Catalog Number	Material	Thread Size (BSPT)						
		1/8 -28	1/4 -19	3/8 -19	1/2 -14	3/4 -14	1 -11	
MP-	Brass	•	•	•	•	•	•	

To order, specify Catalog Number and pipe size. Example: MP-1/4

Pipe Size	H (mm)
1/16	8
1/8	8
1/4	10
3/8	10
1/2	12
3/4	14
1	17

Threadless Diverting Plugs

- Withstand pressures to 72 psi.
- Buna O-ring will seal rough or corroded holes.
- Available in sizes to fit standard or oversize cooling channels



Catalog Number	Drill Size	Nominal Pipe Size	Hex Size	Overall Length	Stock Item
BTP-10	11/32	1/8	5/64	.50	•
BTP-10-OS	23/64				•
BTP-20	7/16	1/4	1/8	.56	•
BTP-20-OS	29/64				•
BTP-40	9/16	3/8	1/8	.62	•
BTP-40-OS	37/64				•
BTP-60	11/16	1/2	1/8	.62	•
BTP-60-OS	45/64				•